


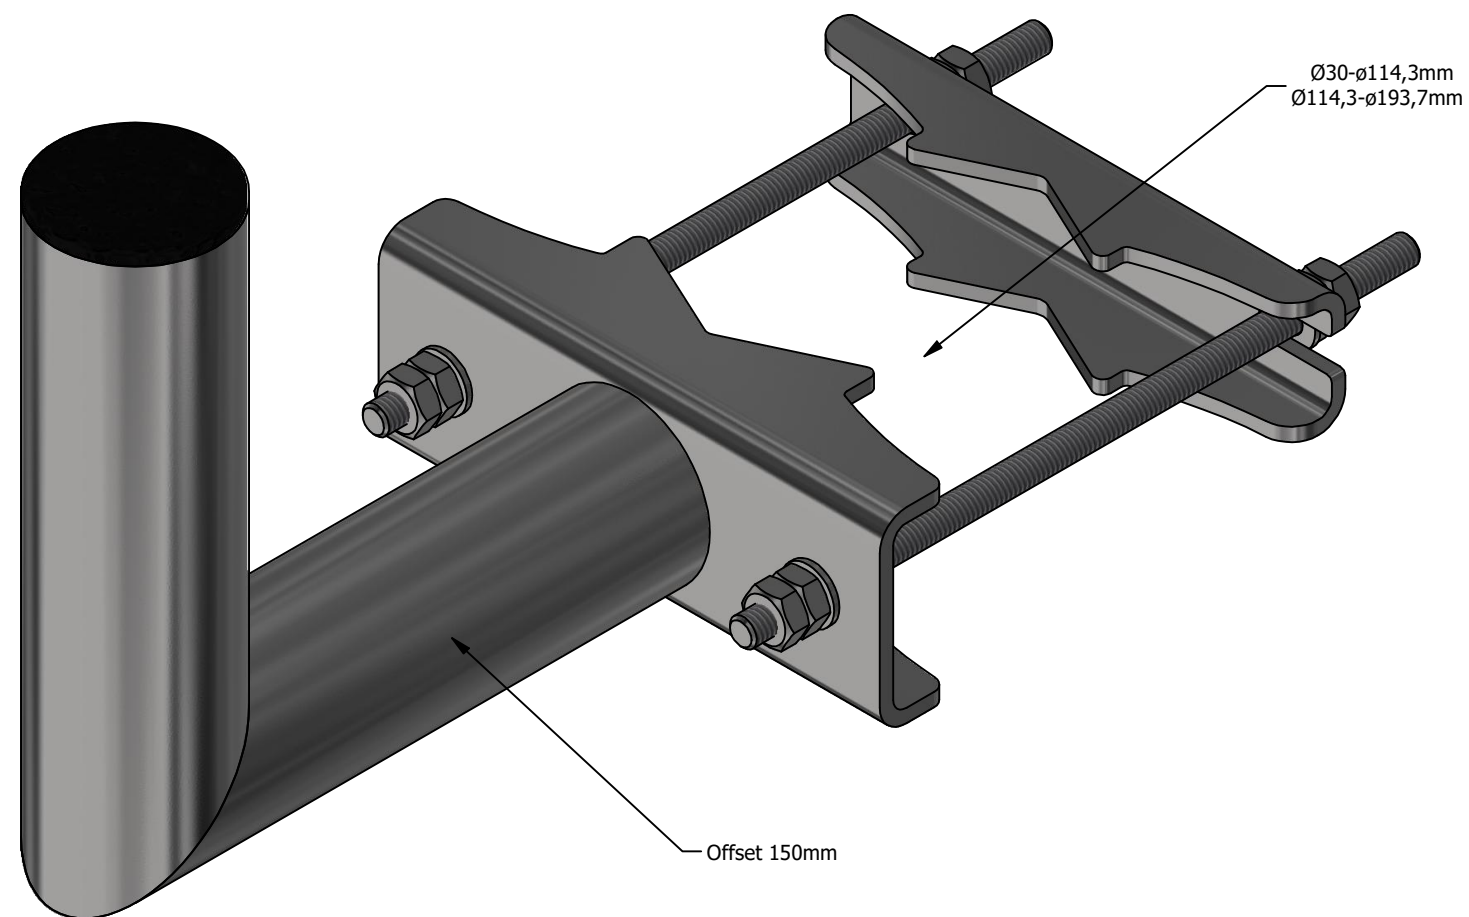

Steel quality

Steel: s355 + hot-dip galvanized acc. EN ISO 1461

Threaded rods: 8.8 FZV

Performance

This data sheet covers diameter from Ø30mm to Ø193,7mm

Max vertical load from equipment per bracket: 50kg

Max horizontal load from equipment per bracket incl safety factor: 1,5kN

Max wind load area per bracket incl form factor (C x A): 0,5m²

Max installation height: 70meter

Terrain classification: TC1

Reference wind speed: 27m/s

M10 nut tightening torque: 30Nm

M10 2nd nut tightening torque: 47Nm

Installation and maintenance guides are available on our website www.telecomsteel.com

Basis for structural design is according to EN 1990:2007 and Danish National Annex DS/EN 1990/NA.

Manufacturing of the structure is carried out in accordance with Execution Class EXC2 as per EN 1090-1+A1:2012 and EN 1090-2:2018.

Governing environmental loading is assessed as wind load, and actions on structures are determined according to EN 1991-1-4 and Danish National Annex DS/EN 1991-1-4/NA.

CE marking is performed in accordance with the Construction Products Regulation (CPR).



Designed by AndersPedersen		Checked by	Approved by	Date	Date 13-12-2025	Item numbers	
						Size	1 arm
						Ø30-Ø114,3mm	40010
						Ø114,3-Ø193,7mm	40030
						AO single	
						Revision B	Sheet 1 / 1



40010