


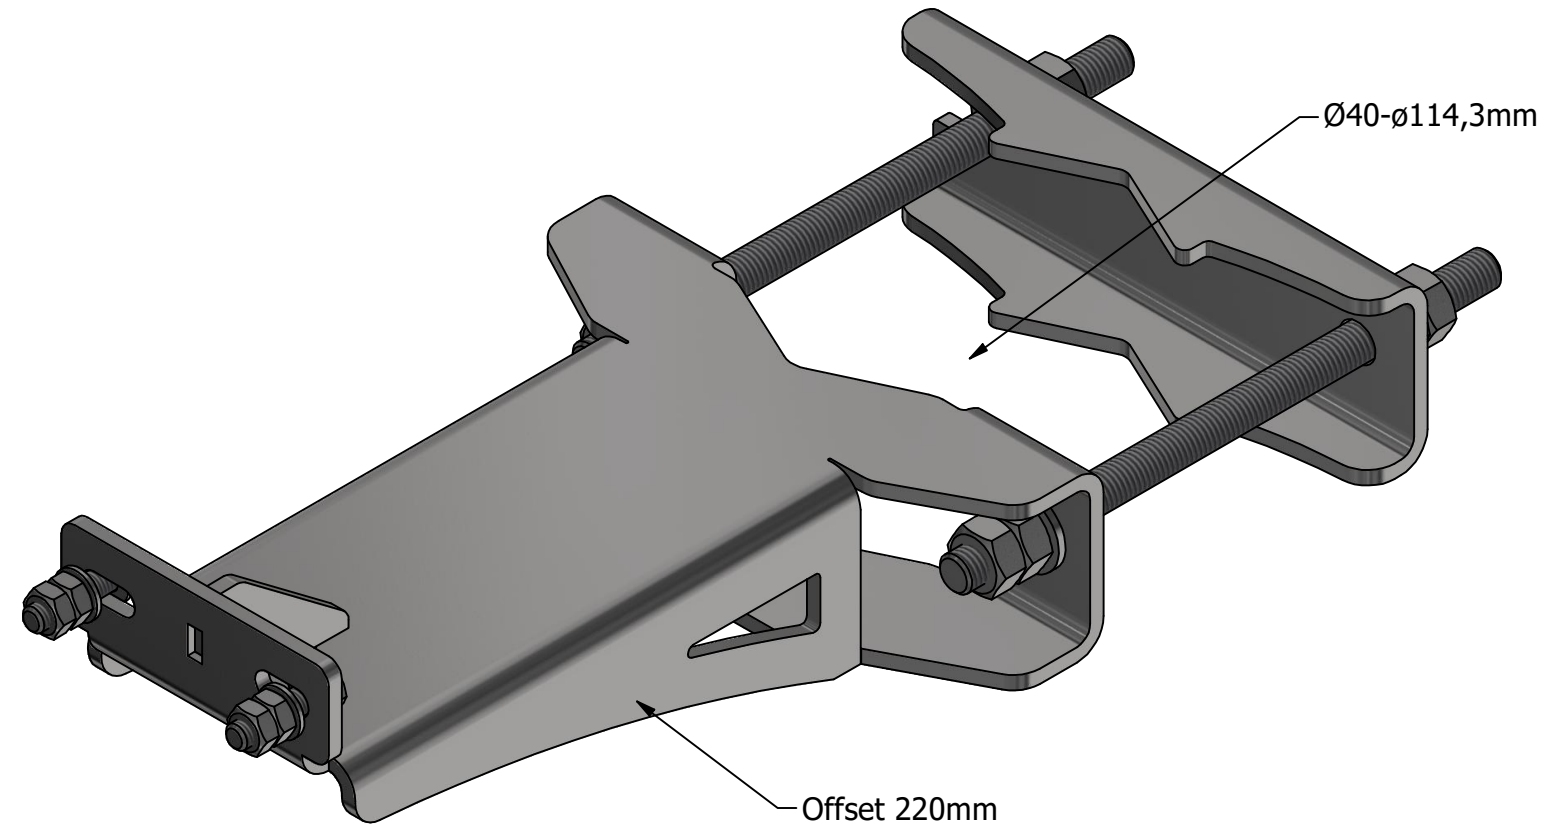

Steel quality

Steel: s355 + hot-dip galvanized acc. EN ISO 1461
Threaded rods: 8.8 FZV

Performance

Max vertical load equipment per bracket: 65kg
Max horizontal load antenna front per bracket incl safety factor: 2,4kN
Max wind load area antenna front per bracket incl form factor (C x A): 0,8m²
Max horizontal load antenna side per bracket incl safety factor: 0,9kN
Max wind load area antenna side per bracket incl form factor (C x A): 0,3m²
Max installation height: 70meter
Terrain classification: TC1
Reference wind speed: 27m/s
M8 nut tightening torque: 24Nm
M8 2nd nut tightening torque: 24Nm
M12 nut tightening torque: 45Nm
M12 2nd nut tightening torque: 60Nm

Can be mounted upside down.

Installation and maintenance guides are available on our website www.telecomsteel.com

Basis for structural design is according to EN 1990:2007 and Danish National Annex DS/EN 1990/NA.

Manufacturing of the structure is carried out in accordance with Execution Class EXC2 as per EN 1090-1+A1:2012 and EN 1090-2:2018.

Governing environmental loading is assessed as wind load, and actions on structures are determined according to EN 1991-1-4 and Danish National Annex DS/EN 1991-1-4/NA. CE marking is performed in accordance with the Construction Products Regulation (CPR).



Item numbers			
Size	Without adaptor	XM-XH adaptor	5G adaptor
Ø40-Ø114,3mm	40042	40052	40062
Designed by AndersPedersen	Checked by	Approved by	Date 15-12-2025
 TELECOMSTEEL DANISH DESIGN & QUALITY		AO single heavy	
		40042	Revision D
			Sheet 1 / 1